


DEEP BLUE 3.0 Pro

Mono

565W MBB Half-cell Module
JAM72S30 540-565/GR/1500V Series

Introduction

Assembled with 11BB PERC cells and gapless ribbon connection technology, the modules can offer higher output power with improved module efficiency, the reduction of cells gaps brings outstanding module appearance. The half-cell configurature makes less shading effect, lower risk of hot spot, as well as more reliable and stable power generation.

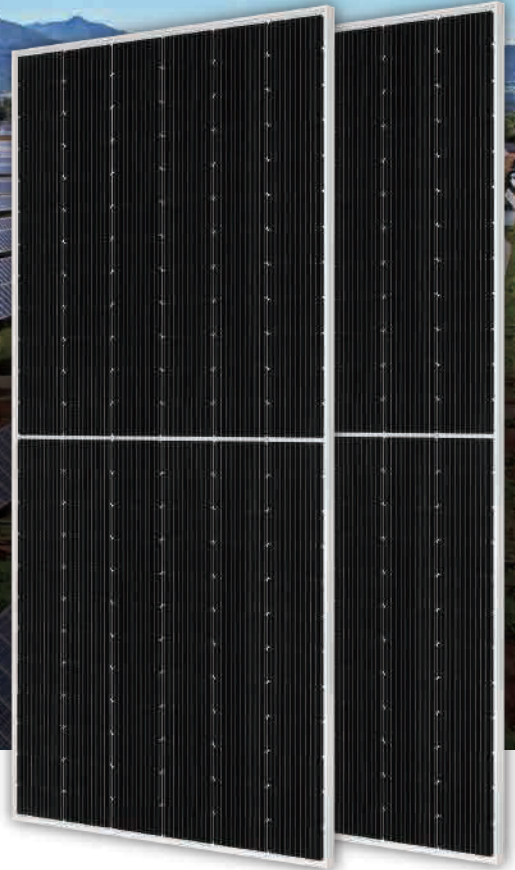

Higher output power and higher module efficiency



More reliable, more stable power generation



Less shading effect




Lower temperature coefficient

Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty

0.55% Annual Degradation Over 25 years

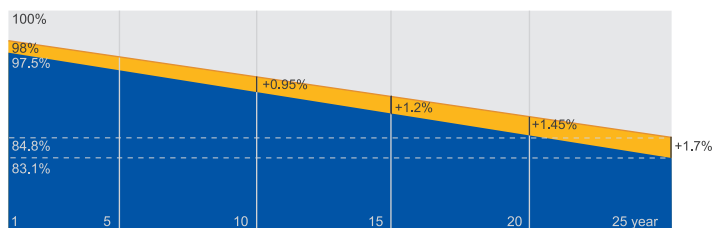

■ New linear power warranty ■ Standard module linear power warranty


Comprehensive Certificates

- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems



MECHANICAL DIAGRAMS

SPECIFICATIONS

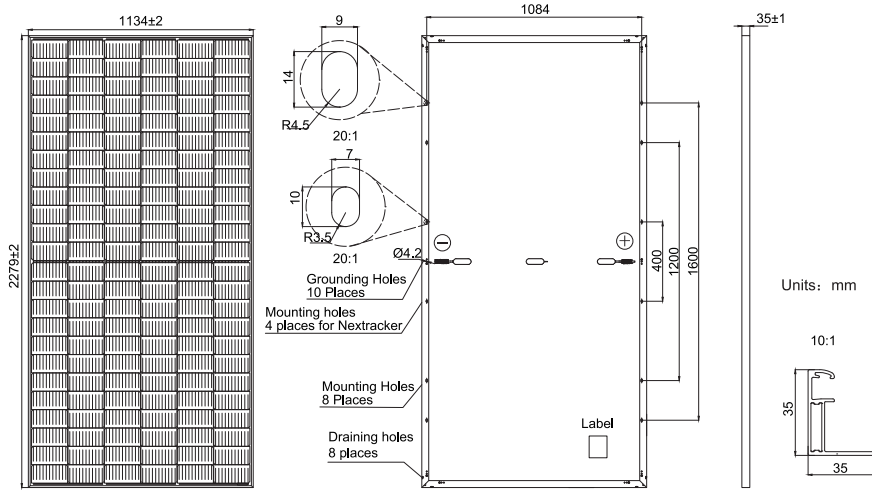

Cell	Mono
Weight	28.6kg±3%
Dimensions	2279±2mm×1134±2mm×35±1mm
Cable Cross Section Size	4mm ² (IEC) , 12 AWG(UL)
No. of cells	144(6×24)
Junction Box	IP68, 3 diodes
Connector	Genuine MC4-EVO2 QC4.10-35
Cable Length (Including Connector)	Portrait: 300mm(+)/400mm(-); Landscape: 1300mm(+)/1300mm(-)
Country of Manufacturer	China/Vietnam

Remark: customized frame color and cable length available upon request

ELECTRICAL PARAMETERS AT STC

TYPE	JAM72S30 -540/GR/1500V	JAM72S30 -545/GR/1500V	JAM72S30 -550/GR/1500V	JAM72S30 -555/GR/1500V	JAM72S30 -560/GR/1500V	JAM72S30 -565/GR/1500V
Rated Maximum Power(Pmax) [W]	540	545	550	555	560	565
Open Circuit Voltage(Voc) [V]	49.60	49.75	49.90	50.02	50.15	50.28
Maximum Power Voltage(Vmp) [V]	41.64	41.80	41.96	42.11	42.27	42.42
Short Circuit Current(Isc) [A]	13.86	13.93	14.00	14.07	14.14	14.21
Maximum Power Current(Imp) [A]	12.97	13.04	13.11	13.18	13.25	13.32
Module Efficiency [%]	20.9	21.1	21.3	21.5	21.7	21.9
Power Tolerance	0~+5W					
Temperature Coefficient of Isc(α _{Isc})	+0.045%/°C					
Temperature Coefficient of Voc(β _{Voc})	-0.275%/°C					
Temperature Coefficient of Pmax(γ _{Pmp})	-0.350%/°C					

STC Irradiance 1000W/m², cell temperature 25°C, AM1.5G

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.They only serve for comparison among different module types. Measurement tolerance at STC: Pmax ±3%, Voc ±3% and Isc ±4%.

ELECTRICAL PARAMETERS AT NOCT

TYPE	JAM72S30 -540/GR/1500V	JAM72S30 -545/GR/1500V	JAM72S30 -550/GR/1500V	JAM72S30 -555/GR/1500V	JAM72S30 -560/GR/1500V	JAM72S30 -565/GR/1500V
Rated Max Power(Pmax) [W]	408	412	416	420	424	428
Open Circuit Voltage(Voc) [V]	46.43	46.55	46.68	46.85	46.99	47.15
Max Power Voltage(Vmp) [V]	38.99	39.20	39.43	39.66	39.85	40.04
Short Circuit Current(Isc) [A]	11.09	11.13	11.17	11.21	11.26	11.31
Max Power Current(Imp) [A]	10.47	10.51	10.55	10.59	10.64	10.69

OPERATING CONDITIONS


Maximum System Voltage	1500V DC(IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	25A
Maximum Static Load,Front*	3600Pa, 1.5
Maximum Static Load,Back*	1600Pa, 1.5
NOCT	45±2°C
Safety Class	Class II
Fire Performance	UL Type 1

NOCT Irradiance 800W/m², ambient temperature 20°C,wind speed 1m/s, AM1.5G


*For NexTracker installations,Maximum Static Load,Front is 2000Pa while Maximum Static Load,Back is 2000Pa.

CHARACTERISTICS

Current-Voltage Curve JAM72S30-555/GR/1500V



Power-Voltage Curve JAM72S30-555/GR/1500V



Current-Voltage Curve JAM72S30-555/GR/1500V

